



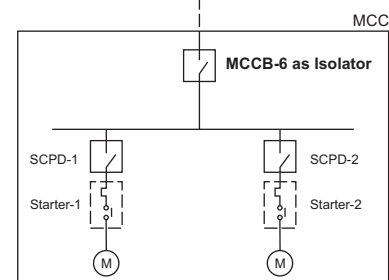

- Used as switching devices for isolation
- Range: 32A to 1250A, 3P & 4P
- Suitable for isolation
- Wide Range of snap fit Internal and External Accessories

Type	Current Rating (A)	3 Pole		4 Pole		Std. Pkg. (Nos.)
		Cat. No.		Cat. No.		
New DN0-160SD	32	CM90716OOEO		CM90717OOEO		1
	63	CM90716OOHO		CM90717OOHO		1
	100	CM90716OOKO		CM90717OOKO		1
	125	CM90716OOL0		CM90717OOL0		1
	160	CM90716OOMO		CM90717OOMO		1
DN2-250SD	200	CM96814OON0OG		CM96815OON0OG		1
	250	CM968020OP0OG		CM968030OP0OG		1
New DN3B-400SD	320	CM984100OQ0OG		CM984120OQ0OG		1
	400	CM984100OR0OG		CM984120OR0OG		1
DN3-400SD	320	CM968040OQ0OG		CM968050OQ0OG		1
	400	CM968040OR0OG		CM968050OR0OG		1
DN3-630SD	500	CM968060OS0OG		CM968070OS0OG		1
	630	CM968060OT0OG		CM968070OT0OG		1
DN4-1250SD	800	CM930410OU0		CM930420OU0		1
	1000	CM930410OV0		CM930420OV0		1
	1250	CM930410OAO		CM930420OAO		1

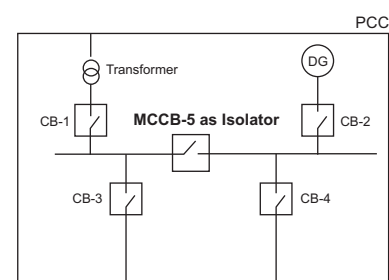


Representative Application Image

d sine MCCBs for Motor back-up Protection:



- Range: 32A to 630A, 50kA
- Suitable for isolation
- Wide Range of snap fit Internal and External Accessories



Representative Application Image

3 Pole				
Type	Current Rating (A)	Breaking Capacity Icu at 415V. AC, 50Hz. (kA)	Cat. No.	Std. Pkg. (Nos.)
DN0-100M	32	50	CM98944OOEO	1
	40		CM98944OOFO	1
	50		CM98944OOGO	1
	63		CM98944OOHO	1
	80		CM98944OOJO	1
	100		CM98944OOKO	1
New DN1-160M	100		CM90345OOKO	1
	125		CM90345OOLo	1
	160		CM90345OOMO	1

3 Pole				
Type	Current Rating (A)	Breaking Capacity Icu at 415V. AC, 50Hz. (kA)	Cat. No.	Std. Pkg. (Nos.)
DN2-250M	200	50	CM92171OONoOG	1
	250		CM92171OOPoOG	1
DN3-400M	320		CM945160OQoOG	1
	400		CM945160ORoOG	1
DN3-630M	500		CM945150OSoOG	1
	630		CM945150OToOG	1



d sine
dsine-M range