

5 Port Air Operated Valve

Series SYA3000/5000/7000

How to Order

A, B port size

Thread piping

Symbol	Port size	Applicable series
M5	M5 x 0.8	SYA3000
O1	1/8	SYA5000
O2	1/4	SYA7000

One-touch fitting (Metric size)

Symbol	Port size	Applicable series
C4	One-touch fitting for ø4	SYA3000
C6	One-touch fitting for ø6	SYA5000
C8	One-touch fitting for ø8	SYA7000
C10	One-touch fitting for ø10	

One-touch fitting (Inch size)

Symbol	Port size	Applicable series
N3	One-touch fitting for ø5/32	SYA3000
N7	One-touch fitting for ø1/4"	SYA5000
N9	One-touch fitting for ø5/16"	SYA7000

Series

Series	Applicable series
3	SYA3000
5	SYA5000
7	SYA7000

Thread type

Symbol	Thread type
Nil	Rc
F	G
N	NPT
T	NPTF

* Except for M5

Bracket

Symbol	Bracket type
Nil	Without bracket
F1	With foot bracket (2 position single only)
F2	With side bracket

Body ported SYA 5 1 20 - C6

Base mounted SYA 5 1 40 -

Series

Series	Applicable series
3	SYA3000
5	SYA5000
7	SYA7000

Type of actuation

1	2 position single (A)4 (B)2 (EA)5 1 3(EB)3 (P)1
2	2 position double (A)4 (B)2 (EA)5 1 3(EB)3 (P)1
3	3 position closed center (A)4 (B)2 (EA)5 1 3(EB)3 (P)1
4	3 position exhaust center (A)4 (B)2 (EA)5 1 3(EB)3 (P)1
5	3 position pressure center (A)4 (B)2 (EA)5 1 3(EB)3 (P)1

P, R port thread type

Symbol	Thread type
Nil	Rc
F	G
N	NPT
T	NPTF

Port size

Symbol	Port size	Applicable series
Nil	Without sub-plate	
O1	1/8 With sub-plate	SYA3000
O2	1/4 With sub-plate	SYA5000
O2	1/4 With sub-plate	SYA7000
O3	3/8 With sub-plate	

5 Port Air Operated Valve *Series SYA3000/5000/7000*

Specifications

Fluid		Air
Operating pressure range MPa	2 position single	0.15 to 0.7
	2 position double	-100 kPa to 0.7
	3 position	-100 kPa to 0.7
Pilot pressure range <small>Note 1)</small> MPa	2 position single	$(0.7 \times P + 0.1)$ to 0.7 P; Operating pressure range
	2 position double	0.1 to 0.7
	3 position	0.2 to 0.7
Ambient and fluid temperature (°C)		-10 to 60 (No freezing.)
Manual override (Manual operation)		Non-locking push type
Lubrication		Not required
Mounting orientation		Unrestricted
Impact/Vibration resistance (m/s ²) <small>Note 2)</small>		150/30

Note 1) In case of single type, be certain that pressure within operating pressure range be supplied to supply port, because return pressure is introduced from supply port (1(P)) for activation.

Note 2) Impact resistance: No malfunction resulted from the impact test using a drop impact tester. The test was performed on the axis and right angle directions of the main valve and armature, when pilot signal is ON and OFF. (Value in the initial state)

Vibration resistance: No malfunction occurred in one sweep test between 45 and 2000 Hz. Test was performed to axis and right angle directions of the main valve and armature when pilot signal is ON and OFF. (Value in the initial state)

⚠ Caution

Be sure to read before handling. Refer to front matter 53 for Safety Instructions and pages 3 to 8 for 3/4/5 Port Solenoid Valve Precautions.

How to Order Manifold Base

SS5YA³₇ - Fill the same as SS5Y³₇.


* Specify the part numbers for valves and options together beneath the manifold base part number.

<Example>

- SS5YA5-42-03-02** 1 set (Type 42, 3 station manifold base part no.)
- * SYA5140 1 set (Single air operated valve part no.)
- * SYA5240 1 set (Double air operated valve part no.)

SY500-26-20A 1 set (Blanking plate assembly part no.)

→ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

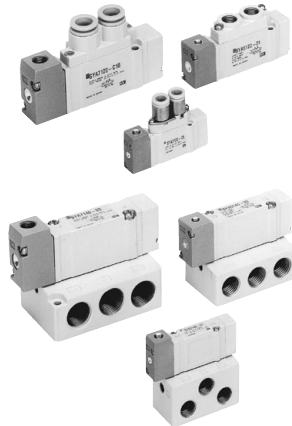

SYA

SYJA

VZA

VFA

VFRA

VPA4

VSA4

SYJA

VZA


VTA

VGA

VPA

VPA3

Pilot Pressure Range (Single pilot)

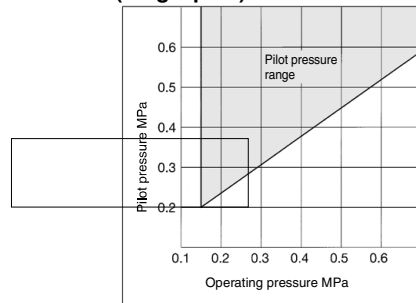

5 Port Air Operated Valve *Series SYA3000/5000/7000*

Flow Characteristics/Weight

Model/Series SYA5□20 (Body ported)

Valve model	Type of actuation	Pilot port size	Port size		Flow characteristics						Weight (g)																															
					1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)																																		
					P	EA	EB	A	B	C [dm ³ /(s·bar)]		b	Cv	C [dm ³ /(s·bar)]	b	Cv																										
SYA5□20-01□	2 position	Single	M5 x 0.8	1/8	C4	(One-touch) (fitting for ø4)	0.75	0.43	0.20	0.85	0.64	0.30	0.28																													
		Double																																								
	3 position	Closed center												1.9	0.35	0.49	2.4	0.39	0.61	58																						
		Exhaust center												1.7	0.43	0.45	1.8	0.35	0.46	64																						
SYA5□20-C4	2 position	Single												M5 x 0.8	1/8	C6	(One-touch) (fitting for ø6)	1.3	0.33	0.33	1.8 [1.4]	0.35 [0.37]	0.44 [0.35]	0.30 [0.27]																		
		Double																																								
	3 position	Closed center																							0.75	0.43	0.20	0.85	0.64	0.30	82											
		Exhaust center																							0.74	0.40	0.19	0.84	0.57	0.28	87											
SYA5□20-C6	2 position	Single																							M5 x 0.8	1/8	C8	(One-touch) (fitting for ø8)	2.2 [0.91]	0.46 [0.58]	0.61 [0.28]	1.8	0.38	0.46	0.27							
		Double																																								
	3 position	Closed center																																		1.5	0.33	0.33	2.0	0.37	0.52	76
		Exhaust center																																		1.3	0.31	0.33	1.6	0.32	0.39	82
SYA5□20-C8	2 position	Single	M5 x 0.8	1/8	C8	(One-touch) (fitting for ø8)	1.3	0.33	0.33	1.8 [1.4]	0.35 [0.37]	0.44 [0.35]	0.30 [0.27]																													
		Double																																								
	3 position	Closed center																																		1.7 [0.80]	0.31 [0.47]	0.42 [0.23]	1.7	0.33	0.44	67
		Exhaust center																																		1.9	0.21	0.45	2.3	0.29	0.57	88
SYA5□20-C8	2 position	Single												M5 x 0.8	1/8	C8	(One-touch) (fitting for ø8)	1.4	0.38	0.39	2.0 [1.5]	0.37 [0.40]	0.52 [0.43]	0.27																		
		Double																																								
	3 position	Closed center																																		1.6	0.29	0.39	1.7	0.38	0.46	74
		Exhaust center																																		1.4	0.38	0.39	2.0 [1.5]	0.37 [0.40]	0.52 [0.43]	79
SYA5□20-C8	2 position	Single																							M5 x 0.8	1/8	C8	(One-touch) (fitting for ø8)	2.2 [1.6]	0.32 [0.44]	0.56 [0.44]	1.8	0.41	0.50	0.27							
		Double																																								
	3 position	Closed center																																		2.2 [1.6]	0.32 [0.44]	0.56 [0.44]	1.8	0.41	0.50	82
		Exhaust center																																		2.2 [1.6]	0.32 [0.44]	0.56 [0.44]	1.8	0.41	0.50	82

Note) [] : denotes normal position.

Model/Series SYA5□40 (Base mounted)

Valve model	Type of actuation	Pilot port size	Port size		Flow characteristics ^{Note 1)}						Weight ^{Note 2)} (g)																				
					1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)																							
					C [dm ³ /(s·bar)]	b	Cv	C [dm ³ /(s·bar)]	b	Cv																					
SYA5□40-02□	2 position	Single	M5 x 0.8	1/4	C4	(One-touch) (fitting for ø4)	2.4	0.41	0.64	2.8	0.29	0.66	105 (42)																		
		Double																													
	3 position	Closed center												1.8	0.47	0.50	1.8	0.40	0.47	110 (47)											
		Exhaust center												1.4	0.55	0.44	3.0 [1.2]	0.33 [0.48]	0.72 [0.37]	115 (52)											
SYA5□40-02□	2 position	Single												M5 x 0.8	1/4	C4	(One-touch) (fitting for ø4)	3.3 [0.84]	0.36 [0.60]	0.85 [0.28]	1.8	0.40	0.48	115 (52)							
		Double																													
	3 position	Closed center																							3.3 [0.84]	0.36 [0.60]	0.85 [0.28]	1.8	0.40	0.48	115 (52)
		Exhaust center																							3.3 [0.84]	0.36 [0.60]	0.85 [0.28]	1.8	0.40	0.48	115 (52)

Note 1) [] : denotes the normal position.

Note 2) () : denotes without sub-plate.

Model/Series SYA7□20 (Body ported)

Valve model	Type of actuation	Pilot port size	Port size		Flow characteristics						Weight (g)																															
					1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)																																		
					P	EA	EB	A	B	C [dm ³ /(s·bar)]		b	Cv	C [dm ³ /(s·bar)]	b	Cv																										
SYA7□20-02□	2 position	Single	M5 x 0.8	1/4	C8	(One-touch) (fitting for ø8)	4.1	0.23	0.93	3.3	0.33	0.81	94																													
		Double																																								
	3 position	Closed center												2.9	0.31	0.70	2.4	0.38	0.63	100																						
		Exhaust center												2.5	0.39	0.65	3.4 [2.1]	0.35 [0.38]	0.82 [0.54]	110																						
SYA7□20-C8	2 position	Single												M5 x 0.8	1/4	C10	(One-touch) (fitting for ø10)	4.3 [2.4]	0.23 [0.32]	0.97 [0.61]	2.2	0.39	0.58	100																		
		Double																																								
	3 position	Closed center																							3.2	0.26	0.77	3.2	0.37	0.82	106											
		Exhaust center																							2.6	0.24	0.63	2.4	0.31	0.62	106											
SYA7□20-C10	2 position	Single																							M5 x 0.8	1/4	C10	(One-touch) (fitting for ø10)	3.3 [2.4]	0.28 [0.22]	0.78 [0.57]	2.2	0.34	0.60	116							
		Double																																								
	3 position	Closed center																																		3.8	0.26	0.86	3.2	0.34	0.82	97
		Exhaust center																																		2.8	0.27	0.67	2.4	0.21	0.59	103
SYA7□20-C10	2 position	Single	M5 x 0.8	1/4	C10	(One-touch) (fitting for ø10)	2.5	0.25	0.59	2.7 [2.0]	0.38 [0.38]	0.70 [0.56]	113																													
		Double																																								
	3 position	Closed center																																		3.8 [2.4]	0.25 [0.31]	0.89 [0.61]	2.3	0.38	0.61	113
		Exhaust center																																		3.8 [2.4]	0.25 [0.31]	0.89 [0.61]	2.3	0.38	0.61	113

Note) [] : denotes normal position.

Model/Series SYA7□40 (Base mounted)

Valve model	Type of actuation	Pilot port size	Port size		Flow characteristics ^{Note 1)}						Weight ^{Note 2)} (g)																															
					1 → 4/2 (P → A/B)			4/2 → 5/3 (A/B → EA/EB)																																		
					C [dm ³ /(s·bar)]	b	Cv	C [dm ³ /(s·bar)]	b	Cv																																
SYA7□40-02□	2 position	Single	M5 x 0.8	1/4	C8	(One-touch) (fitting for ø8)	4.1	0.41	1.1	4.1	0.29	1.0	202 (73)																													
		Double																																								
	3 position	Closed center												3.0	0.43	0.80	2.6	0.41	0.72	210 (81)																						
		Exhaust center												2.6	0.42	0.71	4.7 [1.7]	0.35 [0.48]	1.1 [0.49]	218 (89)																						
SYA7□40-03	2 position	Single												M5 x 0.8	3/8	C10	(One-touch) (fitting for ø10)	5.3 [2.3]	0.39 [0.49]	1.3 [0.65]	2.2	0.49	0.63	202 (73)																		
		Double																																								
	3 position	Closed center																							4.9	0.29	1.2	4.5	0.27	1.1	210 (81)											
		Exhaust center																							3.0	0.40	0.80	2.6	0.45	0.73	218 (89)											
SYA7□40-03	2 position	Single																							M5 x 0.8	3/8	C10	(One-touch) (fitting for ø10)	2.6	0.42	0.71	4.8 [1.7]	0.35 [0.48]	1.1 [0.49]	218 (89)							
		Double																																								
	3 position	Closed center																																		5.3 [2.3]	0.31 [0.51]	1.3 [0.64]	2.3	0.45	0.66	218 (89)
		Exhaust center																																		5.3 [2.3]	0.31 [0.51]	1.3 [0.64]	2.3	0.45	0.66	218 (89)

Note 1) [] : denotes the normal position.

Note 2) () : denotes without sub-plate.



- SYA
- SYJA
- VZA
- VFA
- VFRA
- VPA4
- VSA4
- SYJA
- VZA
- VTA
- VGA
- VPA
- VPA3