



Angle Grinders
GA7020/ S, GA7021 180mm (7")
GA9020/ S 230mm (9")

Satisfy Professional's Needs



**ROBUST
CREATURE**




Heat Resisting Robust Creature 2,200W

Performance data

Efficiency of concrete cutting

Test conditions : Cut concrete to depth of 30 mm.

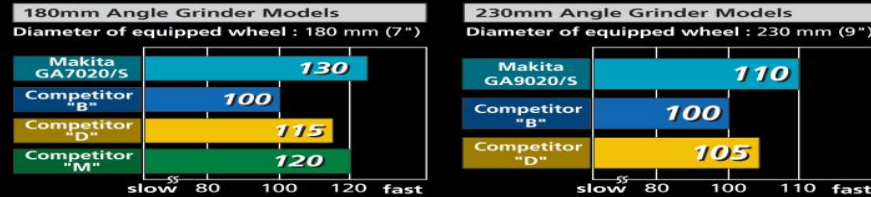

Numbers in the charts above are relative values when setting Competitor "B" capacity as 100. It may differ under some conditions.

Option

Wheel Guard

Standard equipment
180mm (7") Part No. 154674-0
230mm (9") Part No. 154672-4

Dust Collecting Wheel Guard

Part No. 193002-4

Anti Vibration Grip

Part No. 162240-9

Dust Covers

Part No. 194289-1 protect motor from metal dust.

Angle Grinder

GA7020/ S, GA7021, GA9020/ S

204

- Double Insulation
- Soft start (GA7020S, GA9020S only)

Continuous rating Input

Capacity Depressed center wheel:

Wire cup brush:

Cut-off wheel :

No load speed

Dimensions

(L x W x H)

Net weight

Power supply cord

Standard equipment : Lock Nut Wrench, Grip (Tool does not come with depressed center wheel)



GA7020/ S

2,200W
180mm (7")
110mm (4-3/8")
180mm (7")
8,500 rpm
473 x 200 x 140mm
(18-5/8" x 7-7/8" x 5-1/2")
4.7kg (10.4lbs)
2.5m (8.2ft)

GA7021

2,200W
180mm (7")
110mm (4-3/8")
180mm (7")
6,600 rpm
473 x 200 x 140mm
(18-5/8" x 7-7/8" x 5-1/2")
4.7kg (10.4lbs)
2.5m (8.2ft)

GA9020/ S

2,200W
230mm (9")
110mm (4-3/8")
230mm (9")
6,600 rpm
473 x 249 x 140mm
(18-5/8" x 9-3/4" x 5-1/2")
4.7kg (10.4lbs)
2.5m (8.2ft)

Items of standard equipment and specifications may differ from country to country.